


DIMENSIONS	178 mm x 60 mm x 33 mm
BACKLIT TFT SCREEN	
ONE TOUCH SYSTEM	
VERY HIGH DEFINITION MAX RESOLUTION	1700x1368 PIXELS
WIRELESS BLUETOOTH TECHNOLOGY	●
BLUETOOTH USB KEY FOR PC	●
USB PORT 2.0 / 1.1 + USB CABLE 5m + WINDER	
SUPPORT	●
FIXATION STRAP	●
IMAGING SOFTWARE	●
CHARGER 3.5 MM PLUG RECHARGING TIME : 1H	●
4 AAA BATTERIES 1,2V EACH, CAPACITY 1 600 mA/H	●



RSV-HD
WIRELESS

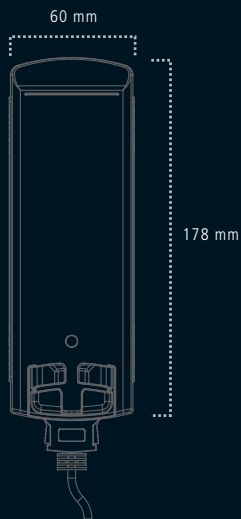

ALWAYS TO HAND!
Install the RSV-HD easily on the wall, a chair, or the x-ray unit arm using the wall-mount support and fixation strap. It is there where you need it.

For all models: CE conformity / medical and electromagnetic security IEC 601-1

SENSORS S1/S2

ACTUAL RESOLUTION	> 20 pl/mm	
THEORETICAL RESOLUTION	26,3 pl/mm	
GREY SCALE	4096	
PIXEL SIZE	19 μm ²	
TECHNOLOGY	CCD + fiberoptics + CSI scintillator	
NORMS	CE conformity / medical and electromagnetic security IEC 601-1	

SPÉCIFICATIONS

	SIZE 1	SIZE 2
USE	periapical / others	retroalveolar / bitewing
ACTIVE SURFACE AREA	30 mm x 20 mm (600 mm ²)	34 mm x 24 mm (816 mm ²)
DIMENSIONS	26.3 mm x 38.7 mm x 4.9 mm	42.6 mm x 30.6 mm x 4.9 mm

The high sensitivity of these sensors makes it possible to reduce the dose of radiation. Supplied with a complete set of Visident sensor holders.

Les images sont des exemples. PHOTOS: DANIEL / IMAGES PRODUITS - 3DMS / Informations données à titre indicatif, sans réserve de modification par Visident



RSV-HD
WIRELESS





Your radiographs in total freedom

Look, touch... Never before has digital radiology been so well designed. Enter into a new dimension: Visident invents the radiology of the new generation.



AUTOMATIC ACTIVATION
With the infrared sensor, as soon as you take the sensor out of its holder, it automatically starts up and Visident Imaging gets ready for acquisition. Without even thinking about it, your system is always ready for use.



DISCOVER VERY HIGH DEFINITION!
The sensors associated with the RSVHD offer fantastic images, contrasted, and with the best definition available on the market. With HD+ resolution, and a grey-scale depth of 4096 levels, your diagnosis enters into a new dimension.




FROM COMPUTER TO COMPUTER, ALWAYS READY!

Your digital radiology system is always available, anywhere on your network. The Visident Imaging software automatically recognizes the activated RSVHD controller(s). It's up to you to choose. Radiology is shared; the management of your dental clinic becomes easy.




Immediate wireless transmission to your computer

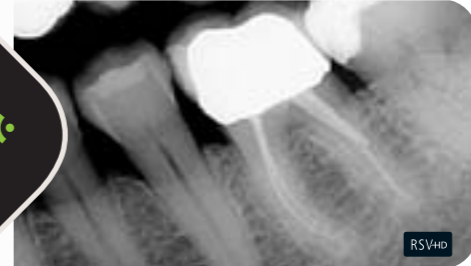

Visualise, enhance, edit, archive in all simplicity thanks to Visident imaging software



TOTAL FREEDOM!
Communicate without any cable. With reduced electricity consumption. Bluetooth™ wireless technology is perfectly adapted to the transmission of radiographic images and enables communication over distances of up to 10 m. With Bluetooth™, you can synchronise your RSVHD and your computer quickly, effortlessly, and with no risk of interference.



FIBEROPTICS TECHNOLOGY
More sensitive, the new range of sensors benefits from the latest advanced technologies: CSI scintillator, fiberoptics, and high definition CCD.



RESEARCH AT VISIDENT
By investing in the research, development, and design of its new products, Visident stays one step ahead of its competitors. The ingenuity of the RSVHD, protected by international patents, demonstrates its capacity for creation and production.